


3.25 PRIMAFLEX KLIPP HT450

Temperature range -20 °C to 400 °C

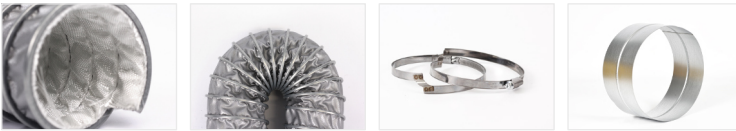

Description

Flexible and lightweight clamping profile hose made of one layer silicon coated glass fabric (outside) and a second layer made of raw glass fabric (inside), reinforced with galvanized steel clamping profile. Highly suitable for suction and transport of hot gaseous media at higher temperatures.

Available in our online shop

Properties

- Superior temperature resistance
- Flexible
- Small bending radii
- Abrasion-resistant
- Vacuum-resistant
- Flame retardant

Length

Standard lengths: 2 - 10 m. According to specifications.

Further informations

Color: grey.

Clamping profile also in VA (1.4512, 1.4301).

Short-term exposure +500 °C

TECHNICAL SPECIFICATIONS

Inner-Ø (mm)	Bending radius (mm)	Vacuum (bar)	Weight (kg/m)	Length (m)	Article-No.
50	30	0,32	0,6	2 - 10	6160050
60	36	0,22	0,7	2 - 10	6160060
65	39	0,19	0,8	2 - 10	6160065
70	42	0,16	0,9	2 - 10	6160070
75	45	0,14	1	2 - 10	6160075
80	48	0,125	1	2 - 10	6160080
90	54	0,1	1,2	2 - 10	6160090
100	60	0,08	1,3	2 - 10	6160100
110	66	0,066	1,3	2 - 10	6160110
120	72	0,056	1,4	2 - 10	6160120
125	75	0,05	1,4	2 - 10	6160125
140	84	0,041	1,6	2 - 10	6160140
150	90	0,036	1,8	2 - 10	6160150
160	96	0,031	1,8	2 - 10	6160160
180	108	0,025	2,1	2 - 10	6160180
200	120	0,02	2,3	2 - 10	6160200
225	135	0,016	2,4	2 - 10	6160225
250	175	0,013	2,6	2 - 10	6160250
300	210	0,009	2,75	2 - 10	6160300
350	245	0,007	3,05	2 - 10	6160350
400	280	0,005	3,4	2 - 10	6160400
450	360	0,004	4	2 - 10	6160450
500	400	0,003	4,5	2 - 10	6160500
600	480	0,002	5,6	2 - 10	6160600
700	560	0,002	6,6	2 - 10	6160700
800	640	0,001	7,6	2 - 10	6160800
900	720	0,001	8,6	2 - 10	6160900